

KLTI9L4X

Product family	Hood
Hood Type	Island Cooker Hoods
Design	T flat
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Material	Stainless Steel + Glass
Type of steel	Brushed
EAN code	8017709312268
Aesthetics	Universal
Colour	Stainless Steel and Glass
Finishing	Brushed
Glass Type	Black
Logo	Silk screen



Controls

Control setting	Touch control back-lighted White	Led colour	White
-----------------	-------------------------------------	------------	-------

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-Vent 2.0	

Technical Features



No. of lights	2	No. of filters	3
Light type	LED	Anti-grease filters	Aluminium
Light power	7.4 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light colour temperature range	2700° - 4000° °K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	820 m³/h	Minimum distance from ELECTRIC hob	650 mm
Motor power	275 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	214	40
Speed 2	334	51
Speed 3	563	64
Intensive speed	741	70

Accessories Included

Tube reduction Yes

Performance / Energy Label



Annual Efficiency Consumption (AEChood) 56 kWh/year

Energy efficiency class (EEC) A

Fluid Dynamic Efficiency (FDE) 33.1

Fluid Dynamic Efficiency class (FDEC) A

Lighting Efficiency (LE) 21.1 lux/W

Lighting Efficiency Class (LEC) B

Grease Filtering Efficiency (GFE) 73.2 %

Grease Filtering Efficiency Class (GFEC) D

Air flow at minumum speed (Qmin) 214 m³/h

Maximum extraction rate 563 m³/h

Intensive extraction rate 741 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 39 dBA

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 65 dBA

Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 70 dBA

Energy Efficiency Index per first cavity 51.6

Measured air flow rate at best efficiency point (Qbep) 384 m³/h

Measured air pressure at best efficiency point (Qbep) 482 Pa

Measured electric power input at best efficiency point (Wbep) 155 W

Normal Power of the light system (WI) 15 W

Average illumination of the light on the cooking surface (Emiddle) 390 lux

Sound power level at highest setting (Lwa) 65 dBA

Electrical Connection

Nominal power 293 W
Voltage 220-240 V

Frequency (Hz) 50-60 Hz
Power supply cable length 1500 mm


Also available

Alternative colours
available

Matte Black

Available colours

KLT19L4MB

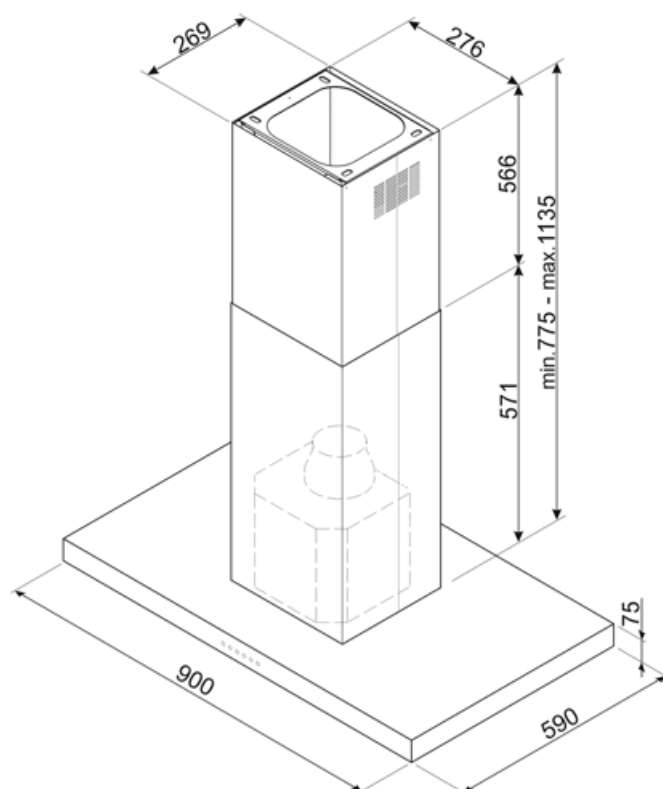

Compatible Accessories



FLT6

Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A: Product drying performance, measured from A+++ to D / G depending on the product family



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



Connection between hob and hood



...



...