

Series 4, built-under dishwasher, 60 cm, White SMP4ECW72S



Optional accessories

SGZ0BI01	decorative strips stainless steel 81,5cm
SGZ0IC00	Small Item Clip for upper rack
SGZ1010	inlet and outlet hose extention
SGZ6BH00	Bottle Holder grey
SMZ1051EU	Mains cable with EU-Plug 5m
SMZ2014	Rack insert for stemware dishwasher
SMZ5000	Dishwashing aid set
SMZ5100	Vario-cutlery basket
SMZ5300	GlassSecure Tray

Dishwashers with user-friendly top control and unique design which allows them to install perfectly flush under a worktop.

- **Comfort Control dishwashers:** seamless design with a control panel that is hidden until you need it.
- **ExtraDry:** the extra option for stronger drying performance.
- **Flex baskets:** flexible and practical solution for easy loading.
- **Get an extra level with VarioDrawer**
- **Adjust the top basket with Rackmatic**

Technical Data

Energy Efficiency Class (Regulation (EU) 2017/1369):	 A
Energy Consumption for 100 cycles Eco Programme (EU 2017/1369):	54 kWh/100 cycles
Maximum number of place settings (EU 2017/1369):	 14
The water consumption of the eco programme in liters per cycle (EU 2017/1369):	9.0 l
Programme duration (EU 2017/1369):	 4:30 h
Airborne acoustical noise emissions (EU 2017/1369):	42 dB(A) re 1pW
Airborne acoustical noise emission class (EU 2017/1369):	 B
Built-in / Free-standing:	 Built-in
Height with worktop:	 0 mm
Dimensions of the product (HxWxD):	815 x 598 x 573 mm
Required niche size for installation (HxWxD):	815-875 x 600 x 550 mm
Depth with open door 90 degree:	 1150 mm
Adjustable feet:	 Yes - all from front
Maximum adjustability feet:	 60 mm
Adjustable plinth:	 Both horizontal and vertical
Net weight:	37.6 kg
Gross weight:	 40.0 kg
Connection rating:	 2400 W
Fuse protection:	10 A
Voltage:	 220-240 V
Frequency:	 50; 60 Hz
Length electrical supply cord:	 175 cm
Length inlet hose:	 165 cm
Length outlet hose:	 190 cm
EAN code:	4242005508556
Installation typology:	 Built-under



Series 4, built-under dishwasher, 60 cm, White SMP4ECW72S

Dishwashers with user-friendly top control and unique design which allows them to install perfectly flush under a worktop.

Capacity and consumption

- Energy Efficiency Class¹: A
- Energy² / Water³: 54 kWh / 9 litres
- Capacity: 14 place settings
- Programme duration⁴: 4:30 (h:min)
- Noise level: 42 dB(A) re 1 pW
- Noise Efficiency Class: B

Programmes & Special functions

- 6 programmes: Eco, Auto, Intensive, Express 60°, Silence, Favourite
- Favourite Program
- 3 special options: Remote Start, ExtraDry, SpeedPerfect+
- Machine Care
- Add-On functions via Home Connect app: HygienePlus, Silence on Demand

Technics

- Home Connect via WLAN
- EcoDrying and heat exchanger
- Sensors: AquaSensor
- DosageAssist
- EcoSilence Drive: low energy consumption and low noise
- Auto All-in-1: Detergent Automation
- Self-cleaning filter system with 3-fold corrugated filter
- Interior tub material: Stainless Steel

Design & Comfort

- Flex Basket system
- VarioDrawer top basket
- InfoLight on door handle
- Rackmatic height-adjustable top basket (3 stage)
- Low friction wheels on lower rack
- Rack Stopper to prevent derailing of lower basket
- 2 foldable plate racks in top basket
- Lower basket: 2 foldable plate racks in bottom basket
- Upper basket: 2 cup shelves in top basket
- 2x simple (long/short) mid grid
- PiezoTouchControl (white)
- Push button top controls
- Plain text display (english)
- Remaining programme time indicator (min)
- Acoustic end of cycle indicator
- Electronic delay timer: up to 24 hours (via app)
- Aqua Mix -glass protection system

Safety

- AquaStop safety system, minimizes water leakage in the kitchen

Installation

- Product dimensions (HxWxD): 81.5 x 59.8 x 57.3 cm
- Including plinth in White
- Funnel
- Including steam protection

¹ Scale of Energy Efficiency Classes from A to G

² Energy consumption in kWh per 100 cycles (in programme Eco 50 °C)

³ Water consumption in litres per cycle (in programme Eco 50 °C)


⁴ Duration of programme Eco 50 °C

**Series 4, built-under dishwasher, 60
cm, White
SMP4ECW72S**

measurements in mm



socket
() values with extension kit

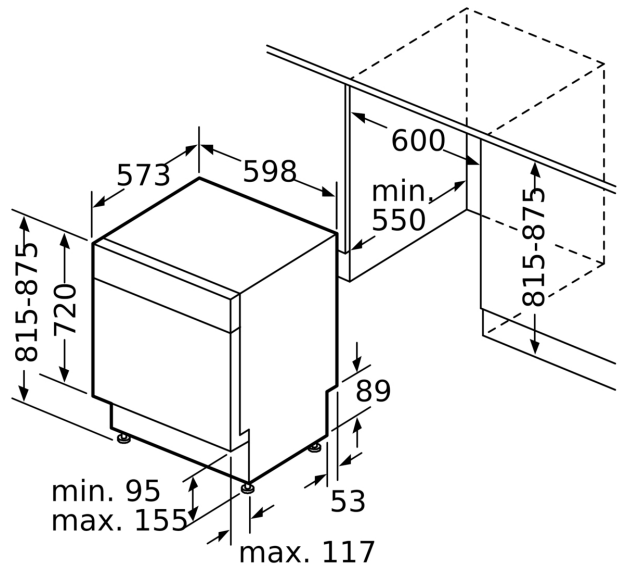

measurements in m