

Series 2, built-in fridge-freezer with freezer at bottom, 177.2 x 54.1 cm, sliding hinge KIN86NSE0



Optional accessories

KSZB6R00 Bottle Rack

The spacious built-in fridge-freezer combination with NoFrost provides optimal food storage and ice formation is no longer an issue

- **No Frost:** you'll never have to defrost your freezer again.
- **Door Open Alarm:** reminds you if the door is not closed properly.
- **Made in Germany:** high quality standards and thorough testing for enduring satisfaction.
- **Safety glass shelves:** safe storage thanks to particularly stable and shatterproof shelves.
- **Organized 2-tiered freezer drawers create extra storage and keeps frozen foods more organized.**

Technical Data

Energy Efficiency Class (Regulation (EU) 2017/1369): E
 Average annual energy consumption in kilowatt hour per year (kWh/a) (EU) 2017/1369: 234 kWh/annum
 Sum of volume of frozen compartments (EU 2017/1369): 76 l
 Sum of volume of chill- and unfrozen compartments (EU 2017/1369): 184 l
 Airborne acoustical noise emissions (EU 2017/1369): .35 dB(A) re 1 pW
 Airborne acoustical noise emission class (EU 2017/1369): B
 Built-in / Free-standing: Built-in
 Number of compressors: 1
 Number of independent cooling systems: 1
 Width of the appliance: 541 mm
 Height: 1772 mm
 Depth of the product: 548 mm
 Net weight: 51.8 kg
 Required niche size for installation (HxWxD): 1775x560x550 mm
 Door panel options: Not possible
 Door hinge: Right reversible
 Number of Adjustable Shelves in fridge compartment: 3
 Shelves for Bottles: No
 Frost free system: Fridge and freezer
 Interior ventilator: No
 Reversible Door Hinge: Yes
 Length electrical supply cord: 230 cm
 Multi-Flow Air Tower: No
 Fast cooling switch: Yes
 : Yes
 Temperature Controlled Drawer: No
 Humidity Control Drawer: No
 Number of Door Bins - Refrigerator: 3
 Door bin adjustability - Refrigerator: Yes
 Tilt-out door bins in fridge: No
 Gallon Storage: Yes
 Number of Gallon storage: 1
 Motorized Shelf: No
 Material of the shelves: Safety glass
 Door opened indicator freezer: No
 Automatic motor-driven ice-maker: No
 Fuse protection: 10 A
 Voltage: 220-240 V
 Frequency: 50 Hz
 Storage Period in Event of Power Failure (h): 10 h
 Door panel options: Not possible
 Energy Star Qualified: No
 Dimensions of the packed product: 72.45 x 24.01 x 25.19
 Net weight: 114.000 lbs
 Gross weight: 124.000 lbs



Series 2, built-in fridge-freezer with freezer at bottom, 177.2 x 54.1 cm, sliding hinge KIN86NSE0

The spacious built-in fridge-freezer combination with NoFrost provides optimal food storage and ice formation is no longer an issue

Performance and consumption

- Energy Class EU19_EEK_D: E
- Total Volume : 260 l
- Annual Energy Consumption: EU19_Annual energy cons rd_D: 234 kWh/a
- Fast freeze facility: yes
- Noise level: EU19_Noise emission_D: 35 dB

Design

- LED interior light in fridge section

Comfort and Safety

- Display: LED electronic temperature control
- Supercool function
- Automatic defrost in fridge section
- Optical and acoustic door open warning system

Fridge Section

- 4 safety glass shelves of which 3 are height adjustable
- 1 door shelf large, 2 door shelf small

Freshness System

- 1 vegetable container

Freezer Section

- Net Freezer Volume:
- EU19_Frozen volume_D: 76 l
- Freezing capacity 24h: EU19_Freezing capa. in 24h_D: 4 kg
- Temperature rise time : 10 H
- NoFrost - no more defrosting!
- SuperFreeze with automatic deactivation
- 3 transparent freezer drawers

Dimensions

- Dimensions (H x W x D): 177.2 cm x 54.1 cm x 54.8 cm
- Niche Dimension (H x W x D): 177.5 cm x 56.0 cm x 55.0 cm

Technical Information




- Door right hinged, reversible hinging
- Nominal voltage: 220 - 240 V
- Length of power cord: 230 cm
- Climate class: EU19_Climate class_D: SN-ST

Accessories


- 1 x ice cube tray

**Series 2, built-in fridge-freezer with
freezer at bottom, 177.2 x 54.1 cm,
sliding hinge
KIN86NSE0**

measurements in mm

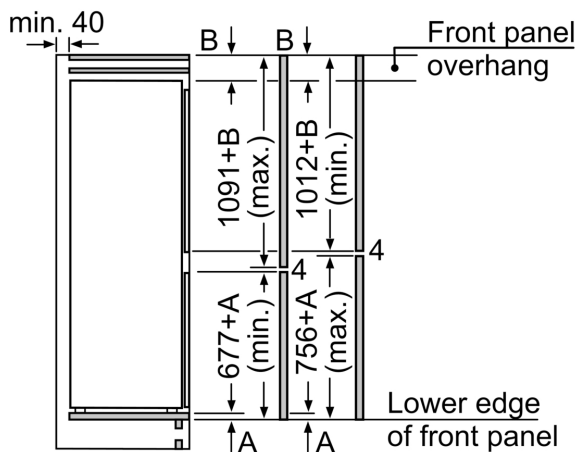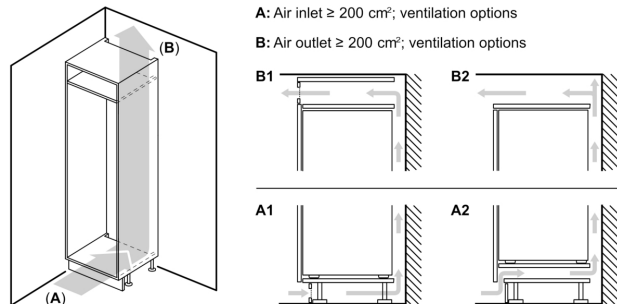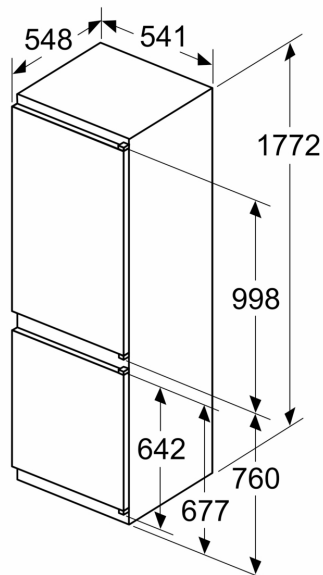

Measurements in mm



A: $\geq 560 \text{ mm}$ (recommended)
B: Socket

The specified unit door dimensions
are valid for a door gap of 4 mm.

measurements in mm